



EXCELLENT IN PERFORMANCE SUPERIOR IN QUALITY

HI PERFORMANCE CABLES



- Made in **Germany** since **1974**
- **30 years** guarantee
- **Constant innovation** with own **R&D** department
- Products for **audio, visual, antenna**
mobile and **electronics**

www.oehlbach.com



Μακεδονίας 148, Θεσσαλονίκη
τ. 2310 477 194
e. info@audiodesigner.gr

www.audiodesigner.gr



ANALOG TO DIGITAL SIGNAL CONVERTER

AD BRIDGE



The Oehlbach AD Bridge is used for high-quality conversion of an analog-electrical signal into a digital signal. After conversion, the audio signal fed in via stereo RCA can be output either via the digital coaxial output or via the optical TOSLINK interface; the sampling rate is 96 kHz. Precise and stable Cirrus Logic Chips are responsible for the high-quality A/D conversion.

HIGH SNR

24ct
GOLD

100%
CONTACT

GERMAN
TECHNOLOGY

packaging size	40.00mm / 140.00mm / 225.00mm
Weight (net)	66 g
Colour	Metallic Brown
Housing material	Ultra thin single conductors
Scope of delivery	AD converter, rubber knobs, power supply unit, operating instructions
Sampling rate	>96 kHz
Features	high-quality analogue-to-digital conversion with high signal-to-noise ratio, 24kt gold plated contacts, precise and stable Cirrus Logic Chips, 100% contact reliability, German Technology
Input voltage	5 V
Input power	5 W
Input current	1 A



Cinch Toslink 2x cinch
socket




item no.	Color	EAN	MSRP
6076	metallic brown	4003635060766	76.9 €

Item No. 6076

More information:



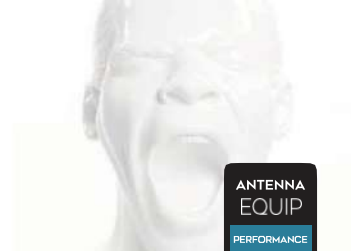


ANTENNA ADAPTER CABLE FOR FM / DAB+ ANTENNA CC 25

The Antenna CC25 is a problem solver for adapting FM and DAB+ radios. Equipped with an alligator clip, this adapter cable can be connected to all common connectors. Gold-plated contacts guarantee high contact stability and reliability.

packaging size	60mm / 160mm / 310mm
Colour	Black
Weight (net)	110 g

item no.	Color	EAN	MSRP
17219	Black	4003635172193	14.4 €

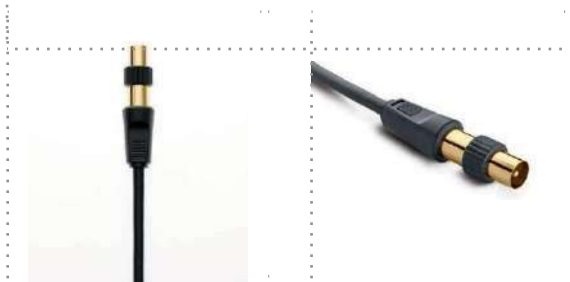

Antenna plug male Alligator clip



Item No. 17219





2xCinch Antenna
plug
female
90°



SIGNAL DIRECTION :



ANTENNA SPLITTER 1:2

ANTENNA SP 12

With the practical antenna distributor from Oehlbach, two TV sets or receivers can be connected to a single antenna socket. Due to the high shielding factor of over 110 dB and two high-quality resistors of 42 ohms each, a high-quality and loss-free doubling of the signal is guaranteed. Compact dimensions also ensure that the module can be easily accommodated. The distributor in a shielded metal housing is suitable for DVB-C as well as for terrestrial television according to the current DVB-T2 standard.

This 2-way antenna distributor is used to connect two TV sets or receivers to one antenna socket.



DVB-T2 HD

DVB-T2 HD is an initiative of ARD, Medienanstalten, Mediengruppe RTL Deutschland, ProSiebenSat.1 Media SE, VPRT and ZDF. We don't use their logo, we just mention the name „DVB-T2 HD“ so customers know that our device is compatible.

packaging size	40.00mm / 140.00mm / 100.00mm
Colour	Silver
Features	German Technology
Weight (net)	150 g
Housing material	Ultra thin single conductors

item no.	Color	EAN	MSRP
17218	Silver	4003635172186	27.4 €



Item No. 17218

More information:






PANEL WEIGHT WITH SPIRIT LEVEL BALANCE CHECKER

The Oehlbach Balance Checker ensures less oscillation or vibration for every record size and thus improves the sound and tone of your vinyl in the long term. Especially the bass reproduction benefits with much more precision. Made of lightweight solid aluminium, this record weight weighs just enough for a vibration damping effect, but not too much so that the motor and bearings of your turntable are not damaged. With the integrated level indicator you can check if the turntable is adjusted correctly and correct it easily if necessary. A massive Oehlbach phono accessory for massive good sound.

packaging size	40.00mm / 140.00mm / 225.00mm
diameter	80 mm mm
Colour	Silver
Weight (net)	300 g

item no.	Color	EAN	MSRP
2613	Silver	4003635026137	42.9 €

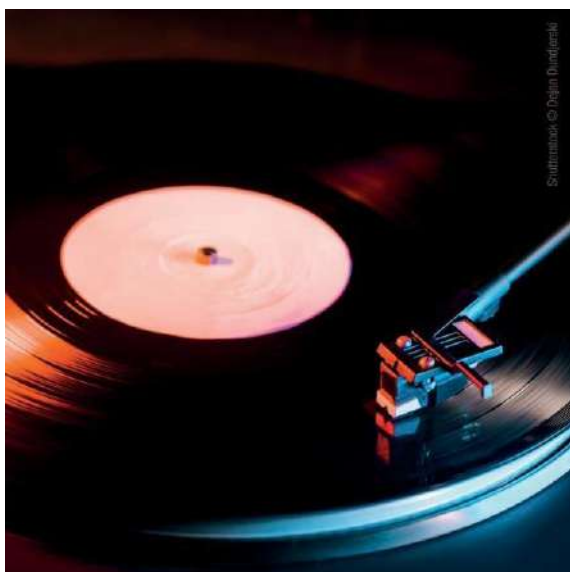

Item No. 2613





SPIRIT LEVEL BALANCE CHECKER LIGHT

The Oehlbach Libelle helps all vinyl lovers to precisely adjust their turntable for optimal sound. Our vial is a high-precision spirit level that reliably indicates the vertical alignment of a turntable on two axes. This vial is much more than an ordinary spirit level. Oehlbach has specially adapted it for use with a record player: it is light, has a finely tuned display and is very easy to use. For maximum vinyl listening pleasure, the small, round Oehlbach vial should not be missing from any record collection.

packaging size	25.00mm / 140.00mm / 225.00mm
diameter	60 mm mm
Colour	Silver
Weight (net)	60 g
Article height	9,6 mm



item no.	Color	EAN	MSRP
2616	Silver	4003635026168	36.9 €



Item No. 2616





BANANA PLUG

BANANA B1

UP TO 10 MM²

Banana connectors for assembling loudspeaker cables. The plugs enable optimum and convenient connection of speaker cables to speakers and electronic components, such as AV receivers and amplifiers. A secure contact and excellent transmission quality are ensured here. The plug contacts are plated with 24-carat gold and the cable feed may be executed at the plug up to cable cross-sections of 10 mm². We suggest that high-quality end sleeves be used on the leads for best assembly results.

UP TO
10 mm²

24ct
GOLD

FULL
METAL

Features	up to 10 mm ² cable cross section, 24kt gold plated contacts
Connector material	solid metal plug

Banana
plug



item no.	Color	EAN	MSRP
103001	Gold	4003635930014	14.4 €
3001	Gold	4003635030011	59.9 €





BANANA PLUG

BANANA PIN-B3



Banana connectors for assembling loudspeaker cables. The connector guarantees good contact to loudspeaker terminals and electronic components, e.g. AV receivers and amplifiers. Which ensures stable and good transmission qualities in all situations. The plug contacts are plated with 24-carat gold and the cable feed may be executed at the plug up to cable cross-sections of 4 mm². We suggest that high-quality end sleeves be used on the leads for best assembly results.

UP TO
4 mm²

24ct
GOLD

FULL
METAL

Features	up to 4 mm ² cross section, 24kt gold plated contacts
content	4 pieces
Connector material	solid metal plug

Banana
plug



item no.	Color	EAN	MSRP
3009	Gold	4003635030097	33.9 €
103009	Gold	4003635930090	7.7 €

More information:





HIGH-SPEED HDMI® CABLE WITH ETHERNET BLACK MAGIC

This high-speed HDMI® cable delivers unlimited home-cinema fun. The additional data channel (Ethernet channel) allows Internet-enabled AV components, e.g. Blu-ray players and AV receivers, to be connected without the need for additional network cables. The high-quality inner conductor, which is manufactured from OFC copper and features triple shielding as well as 24-carat gold-plated plug contacts, guarantees the transmission of completely stable and interference-free signals - particularly where critical digital signals are concerned.



"x.v.Color" and the „x.v.Color“ logo is a registered trademark of Sony Corporation.

Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
Shielding	triple shielding
Shielding construction	2 x aluminium foil + 1 x copper braiding
Audio format	DTS HD, Dolby True HD, DTS, DTS:X, DTS-HD Master Audio, Dolby Digital Plus, Dolby Atmos
Transmission rate	18 Gbps
Screen resolution	4K UHD 50/60 Hz
HDMI Features	32 digital audio channels, 3D TV at 4 K resolution, 3D TV, High-Speed-HDMI®-cable, ARC - Audio Return Channel, 30/36/48-bit Deep Color, Dolby Vision, HEC - HDMI® with Ethernet channel, CEC 2.0, 18 GBit/s data rate, HDR - High Dynamic Range Image
Features	30 years warranty, 21:9 cinema image format, HDR, 24kt gold plated contacts , German Technology

item no.	Length	Color	EAN	MSRP
92449	0.40 m	Black	4003635924495	
92450	0.75 m	Black	4003635924501	
92451	1.20 m	Black	4003635924518	
92453	1.70 m	Black	4003635924532	






item no.	Length	Color	EAN	MSRP
92454	2.20 m	Black	4003635924549	
92455	3.20 m	Black	4003635924556	
92456	5.10 m	Black	4003635924563	
92457	7.50 m	Black	4003635924570	164.0 €
92458	10 m	Black	4003635924587	197.0 €

More information:




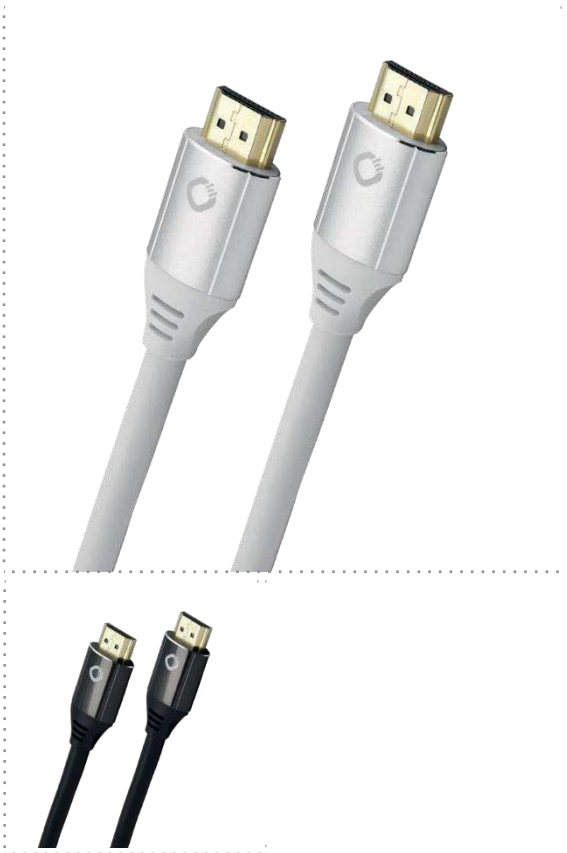

HDMI



SIGNAL DIRECTION

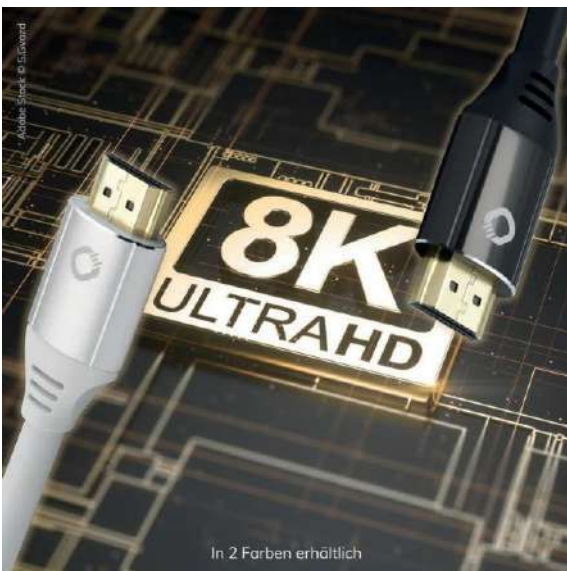


In 2 Farben erhältlich

ULTRA-HIGH-SPEED HDMI CABLE

BLACK MAGIC MKII

Ready for the future in 8K (60Hz) - Oehlbach Ultra High Speed HDMI® Cable Black Magic MKII. This HDMI cable certified by the HDMI organization is made for crystal clear pictures and sound for movies and games in 4K (with up to 120Hz and HDR10 Plus) and is also ready for the 8K standard. To do so, it has a bandwidth of 48 Gbit/s and supports all important audio formats in home entertainment. For interference-free and loss-free signal transmission with triple shielding, an inner conductor made of OFC copper and equipped with 24 carat gold-plated plug contacts.

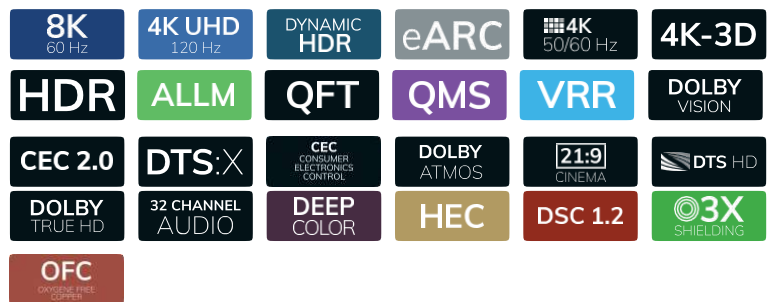

The terms HDMI®, HDMI High definition Multimedia Interface® and the HDMI® Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

Connector material	solid metal plug
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
Shielding	triple shielding
Shielding construction	2 x aluminium foil + 1 x copper braiding
Audio format	Dolby True HD, 5.1 DTS HD, DTS-HD Master Audio, DTS:X, Dolby Atmos
Transmission rate	48 Gbps
Screen resolution	8K UHD 60Hz, UHD 4K UHD 120Hz, 4K-3D 50/60 Hz, 4K UHD 50/60 Hz, 1080p Full HD
HDMI Features	Auto Low Latency Mode, QMS - Quick Media Switching, QFT - Quick Frame Transport, Video compression DSC 1.2, Dynamic HDR, VRR - Variable Refresh Rate, eARC - Enhanced Audio Return Channel, Dolby Vision, High-Speed-HDMI®-cable, 3D TV, 32 digital audio channels, HEC - HDMI® with Ethernet channel, CEC 2.0, HDR - High Dynamic Range Image, 30/36/48-bit Deep Color
Features	24kt gold plated contacts , 30 years warranty, German Technology

More information:





item no.	Length	Color	EAN	MSRP
92488	0.75 m	White	4003635924884	27.9 €
92489	0.75 m	Black	4003635924891	27.9 €
92490	1.50 m	White	4003635924907	32.9 €
92492	1.50 m	Black	4003635924921	32.9 €
92491	2 m	White	4003635924914	38.9 €
92493	2 m	Black	4003635924938	38.9 €
92494	3 m	White	4003635924945	43.9 €
92495	3 m	Black	4003635924952	43.9 €



SUBWOOFER Y-RCA CABLE

BOOOM!

Preassembled Y-subwoofer cable for connecting active subwoofers to home-cinema systems! Just the thing for connecting active subwoofers (stereo input) to AV receivers (mono output). The inner conductor's large diameter and the coaxial design mean that this Oehlbach cable is particularly suitable for the transmission of low frequencies. The inner conductor made from oxygen-free OFC copper also guarantees absolutely precise and powerful bass reproduction. The effective copper-braid shielding eliminates any occurring signal interference and guarantees perfect transmission quality.



Bending radius	40 mm
Inner conductor material	OFC - oxygen-free copper
cable geometry	Flat
Shielding	Shielding conductor
Shielding construction	1 x copper braid
Features	24kt gold plated contacts , 30 years warranty, 100% contact reliability, German Technology
cable material	Ultra-thin individual wires
Cable diameter	2 x 5,5 mm



item no.	Length	Color	EAN	MSRP
22702	2 m	Blue	4003635227022	42.9 €
22703	3 m	Blue	4003635227039	53.4 €
22705	5 m	Blue	4003635227053	64.9 €
22710	10 m	Blue	4003635227107	114.0 €
22711	12.50 m	Blue	4003635227114	
22712	15 m	Blue	4003635227121	142.0 €
23702	2 m	Anthracite	4003635237021	42.9 €
23703	3 m	Anthracite	4003635237038	53.4 €
23705	5 m	Anthracite	4003635237052	64.9 €
23708	8 m	Anthracite	4003635237083	
23710	10 m	Anthracite	4003635237106	114.0 €
23711	12.50 m	Anthracite	4003635237113	128.0 €
23712	15 m	Anthracite	4003635237120	142.0 €

More information:




BLUETOOTH® TRANSMITTER / RECEIVER BTR EVOLUTION 5.0



Mit Blick auf die gebotene
Ausstattung und die
gelieferte Performance ist
der BTR Evolution 5.0 [...] eine wirklich anspruchs-
volle Lösung ...
[Zitat Lite Magazin]



This Bluetooth transmitter / receiver gives the Bluetooth standard 5.0 completely new possibilities. Connect home entertainment hardware optically with Toslink cable or analog via stereo RCA and send or send pure sound wirelessly from or to the BTR Evolution 5.0, the new multitool for your sound enjoyment. As a 2-in-1 adapter, it not only transmits but also receives - both with the Bluetooth® 5.0 standard and backwards compatible. Switching between send and receive mode is possible with a toggle switch. Pair the Oehlbach BTR Evolution 5.0 with two devices and enjoy double CD quality with aptX HD. With low latency function and a delay of less than 40 milliseconds you will not notice anything of the wireless transmission and can simply enjoy music and other sounds to the full extent as with an Oehlbach cable connection. This sounds good at home and with its elegant, high-quality design in two colours, it looks good in any home.



Qualcomm aptX and the aptX logos are owned by Qualcomm Technologies, Inc. and/or its subsidiaries. Use is granted. The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Oehlbach is under license. Other trademarks and trade names are those of their respective owners. The Qualcomm aptX - Low Latency Logo is owned by Qualcomm Technologies, Inc. and/or its subsidiaries. Use is granted. The Qualcomm aptXHD logo is owned by Qualcomm Technologies, Inc. and/or its subsidiaries. Use is granted.

Transmission standard	Bluetooth 5.0
Weight (net)	145 g
Scope of delivery	BTR Evolution 5.0, power supply, USB charging cable 1m, Cinch/jack adapter 30 cm, AUX cable 20 cm, optical cable 1m, manual
Air humidity range	5 - 90 %
Sampling rate	48 kHz
Features	24kt gold plated contacts , German Technology
Article width	75 mm
Article height	19 mm
Article depth	75 mm
Input voltage	5 V
Input power	0,5 W
Input current	0,1 A
Reach	10 m
Broadcast area	2.4 GHz
Latency	40 ms

More information:





item no.	Color	EAN	MSRP
6052	Silver	4003635060520	142.0 €
6053	Red	4003635060537	142.0 €






MOBILE BLUETOOTH TRANSMITTER / RECEIVER

BTR XTREME 5.0



The Oehlbach BTR Xtreme 5.0 finally makes all audio devices with jack plug / stereo cinch that are not equipped with Bluetooth® finally Bluetooth®-compatible. Simply connect it to your audio source or audio output device via the 3.5 millimetre jack connection. As a 2-in-1 adapter, it not only transmits but also receives - both with the Bluetooth® 5.0 standard and backwards compatible. Switching between send and receive mode is possible by means of a toggle switch. For its transmissions, the BTR Xtreme 5.0 uses the Qualcomm aptX HD codec for music enjoyment in CD quality and aptX Low Latency for simultaneously reduced latency times of less than 40 ms and thus practically delay-free sound transmissions. The BTR Xtreme 5.0 is an all-rounder, because it even masters simultaneous transmission to 2 different devices, e.g. two headphones. It is also possible to couple two transmitting devices, e.g. two smartphones, with one output device. Use it at home or on the road with a weight of only 18 grams, small dimensions and long battery life of up to 12 hours.



Qualcomm aptX and the aptX logos are owned by Qualcomm Technologies, Inc. and/or its subsidiaries. Use is granted. The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Oehlbach is under license. Other trademarks and trade names are those of their respective owners. The Qualcomm aptX - Low Latency Logo is owned by Qualcomm Technologies, Inc. and/or its subsidiaries. Use is granted. The Qualcomm aptXHD logo is owned by Qualcomm Technologies, Inc. and/or its subsidiaries. Use is granted.

Jack
Socket



SIGNAL DIRECTION



Bi-Directional

BTR XTREME 5.0
Features

ULTRA LIGHT

up to 12 hours mobile use

mobile and for use at home

VERSION BT 5.0

- + Senden und Empfangen in einem Gerät
- + Mit zwei Geräten gleichzeitig koppelbar
- + Sehr leicht (18 g) & dank eingebautem Akku mobil einsetzbar
- + Bluetooth® Version 5.0
- + 3,5 mm Klinkenanschluss für analoge Signale
- + aptX HD garantiert Audioübertragung in CD-Qualität
- + Mobil (Akku) sowie am Stromanschluss nutzbar

Die Bluetooth- und aptX-Logos sind eingetragene Marken der Bluetooth SIG, Inc. und der Qualcomm Technologies, Inc. und werden hiermit unter Lizenz an Oehlbach übertragen. Alle anderen Marken und Namen sind Eigentum ihrer jeweiligen Inhaber. © 2019 Oehlbach Technologies AG. Alle Rechte vorbehalten.

Transmission standard	Bluetooth 5.0
Housing material	More than five Inputs
Scope of delivery	Bluetooth adapter, USB charging cable, jack cable
Air humidity range	5% - 90 %
Sampling rate	48 kHz
Operating elements	Receiver/transmitter selector switch
Features	Ultra Light, German Technology
Article width	43 mm
Article height	10 mm
Article depth	43 mm
Reach	10 m
Latency	40 ms

item no.	Color	EAN	MSRP
6050	Black	4003635060506	88.0 €
6051	White	4003635060513	88.0 €

More information:





SIGNAL DIRECTION



TRANSMITTER FOR BLUETOOTH SIGNALS

BTT 5000

The acoustic quality of high-quality hi-fi components offers a life cycle that is difficult to reconcile with the volatility of current technologies. Thanks to the BTT 5000, proud owners of a powerful hi-fi system no longer have to look enviously at uncomplicated wireless streaming from a wide variety of music sources. The compact Bluetooth transmitter is the flexible link between the classic HiFi world and modern music streaming. Thanks to the included 3.5mm jack cable, the BTT 5000 can be connected to any equipment with a corresponding output. aptX guarantees artefact-free transmission of the signal in CD quality. A special feature of the BTT 5000 is „Dual Pairing“ - two devices can connect to the transmitter at the same time.



Qualcomm aptX and the aptX logos are owned by Qualcomm Technologies, Inc. and/or its subsidiaries. Use is granted. The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Oehlbach is under license. Other trademarks and trade names are those of their respective owners.

packaging size	60mm / 105mm / 190mm
Transmission standard	Bluetooth 3.0
Weight (net)	123 g
Colour	Black
Frequency Response	10 bis 22 000 Hz
Housing material	More than five Inputs
Scope of delivery	BTT5000, power supply unit, jack cable, cinch/3.5 adapter, operating instructions
Air humidity range	5 bis 90 %
Sampling rate	Up to 44.1 kHz
Features	24kt gold plated contacts
Input voltage	5 V
Input power	3 W
Input current	0,6 A

item no.	Color	EAN	MSRP
6063	Black	4003635060636	114.9 €

Item No. 6063

More information:





RECEIVER FOR BLUETOOTH SIGNALS

BTX 1000



Jack Plug




SIGNAL DIRECTION



Uni-Directorate

If you own high-quality hi-fi equipment, you really don't want to miss out on the acoustic power of audiophile components. But, on the other hand, sometimes you just want to be as wirelessly free as young people are today with their smartphones and tablet PCs that they always have with them and that deliver music to Bluetooth-capable devices without the need for annoying cables. With the BTX 1000, Oehlbach has introduced the perfect tool for combining the classical world of hi-fi with the modern world of music streaming. This compact Bluetooth receiver may be connected directly to the 3.5 mm line-in, stereo cinch and AUX connectors on stereo and loudspeaker systems and so turn them into Bluetooth-capable components. Which means you'll be able to use your existing hi-fi set-up to play your entire digital library at the highest of qualities. The Bluetooth receiver will also allow you to enjoy music wirelessly on high-quality headphones with 3.5 mm jacks. Oehlbach has used the latest aptX technology to build the BTX 1000 to ensure that it delivers outstanding clarity, performance and transparency in CD quality without any loss in quality. Oehlbach's BTX 1000 also features a comfortable 10-metre range and a battery life that lasts up to 10 hours.

The Bluetooth receiver may be charged from any normal USB port using the supplied charging cable. It does not come with its own power adapter.



Qualcomm aptX and the aptX logos are owned by Qualcomm Technologies, Inc. and/or its subsidiaries. Use is granted. The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Oehlbach is under license. Other trademarks and trade names are those of their respective owners.



packaging size	55mm / 105mm / 190mm
Transmission standard	Bluetooth 4.0
Weight (net)	125 g
Colour	Black
Battery life	up to 10 h
Input voltage	5 V
Input power	2,5 W
Input current	0,5 A

item no.	Color	EAN	MSRP
6062	Black	4003635060629	89.9 €

Item No. 6062





DIGITAL TO ANALOG CONVERTER

DIGI BRIDGE

The Oehlbach DA Converter of the extra class converts digital to analog audio signals. High resolution coded signals are recorded via a coaxial or optical input. A switch is used to select the desired input and the subsequent output is a 2-channel RCA output. Inside the device, a high-quality Cirrus Logic chip takes over the loss-free conversion from digital to analog. The handy DA Converter is suitable for audio sources in PCM format and supports audio signals up to 192kHz/24Bit. The USB port or the power supply plug is used for power supply. (Dolby and DTS formats are not decoded).

192kHz
24Bit

24ct
GOLD

100%
CONTACT

packaging size	40.00mm / 140.00mm / 225.00mm
Weight (net)	210 g
Colour	Metallic Brown
Housing material	Ultra thin single conductors
Scope of delivery	DAC, power supply unit, operating instructions
Air humidity range	5 bis 90 %
Sampling rate	192 KHz
Features	100% contact reliability, 24kt gold plated contacts , precise and stable Cirrus Logic Chips
Input voltage	5 V
Input power	5 W
Input current	1 A

item no.	Color	EAN	MSRP
6064	metallic brown	4003635060643	85.9 €





DIGITAL ELECTRICAL-OPTICAL AUDIO CONVERTER

DIGICON C/O



The 3-star Oehlbach Digicon C/O converts a digital electrical signal into an optical signal. For this purpose, a coaxial and an optical connection are integrated into the solid metal housing of the Digicon C/O, which is 24 carat gold-plated for maximum transmission and contact reliability. The Digicon C/O converts compressed and uncompressed audio signals up to a sampling depth of 24 bits. Thanks to strictly selected electronic components, the conversion process is absolutely loss-free and guarantees an above-average quality of the converted output signal.




packaging size	40.00mm / 140.00mm / 225.00mm
Weight (net)	56 g
Colour	Metallic Brown
Housing material	Ultra thin single conductors
Scope of delivery	Digicon, power supply, operating instructions
Air humidity range	20 bis 90 %
Sampling rate	48 kHz
Features	24kt gold plated contacts , 100% contact reliability, German Technology
Input voltage	5 V
Input power	5 W
Input current	1 A



item no.	Color	EAN	MSRP
6038	metallic brown	4003635060384	87.0 €





DAB+/FM ANTENNA WITH 75 OHM QUICK F CONNECTOR

DIGITAL WIRE TWO

The high-quality antenna ensures optimum reception across the entire DAB+ and FM range thanks to its 75 ohm matched Quick F connector. The mounting holes on the outer end of the antenna enable flexible installation.

FREQUENCY RANGE
DAB+ 174 MHz - 230 MHz

FREQUENCY RANGE
FM 87.5 MHz - 108 MHz

24ct
GOLD

FULL
METAL

75Ω

packaging size	30.00mm / 140.00mm / 100.00mm
Reception area	VHF: 174 - 230 MHz
Colour	White
Weight (net)	30 g
Transmission standard	DAB+, FM
Features	24kt gold plated contacts

Antennas
F-con-
nector



SIGNAL DIRECTION

→ Uni-Direc-
torate

item no. Color EAN MSRP

17224	White	4003635172247	15.9 €
-------	-------	---------------	--------

Item No. 17224



HIGH SPEED HDMI® CABLE WITH ETHERNET

EASY CONNECT HS.40

The Easy Connect HS.40 forms the interface of excellent quality and a high degree of price consciousness in the portfolio of the Oehlbach cable specialists. Thanks to data rates of up to 18 Gbit/s, the high-speed HDMI cable does, of course, support the full range of data volumes of the current 4K/UltraHD signals at 50 and 60 Hz. Up to 32 digital audio channels, including the new 3D audio formats Dolby Atmos, DTS:X and Auro3D, are transported to a connected AV device by the Easy Connect HS.40 without any losses. Solid metal connectors guarantee maximum signal stability, with additional data channels available for HDMI CEC and Ethernet.



HDMI



SIGNAL DIRECTION


Bi-Directional


x.v.Color

Connector material	High-quality fabric sheathing
Colour	Black/Grey
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
Shielding	triple shielding
Audio format	DTS, DTS:X, DTS-HD Master Audio, Dolby Digital Plus, Dolby Atmos, DTS HD, Dolby True HD
Transmission rate	18 Gbps
Screen resolution	4K UHD 50/60 Hz
HDMI Features	High-Speed-HDMI®-cable, 32 digital audio channels, CEC 2.0, 3D TV, ARC - Audio Return Channel, 30/36/48-bit Deep Color, 3D TV at 4 K resolution, Dolby Vision, HEC - HDMI® with Ethernet channel, HDR - High Dynamic Range Image, 18 GBit/s data rate, x.v.Color - Additional Color Space
Features	30 years warranty, 24kt gold plated contacts , 21:9 cinema image format

item no.	Length	Color	EAN	MSRP
137	1.44 m	Black/Grey	4003635001370	32.9 €
138	1.44 m	White	4003635001387	

More information:





HIGH-SPEED HDMI® CABLE WITH ETHERNET EASY CONNECT HS

High-speed HDMI® cable with an additional data channel (Ethernet channel) for connecting internet-enabled AV components, e.g. Blu Ray players, without the use of an additional network cable. High-quality metal plug with 24-carat gold-plated plug contacts and tough sheath round off the profile of this HDMI® cable for the price-conscious.




x.v.Color

Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
Shielding	Multiple shielding
Audio format	Dolby Atmos, DTS, DTS:X, Dolby True HD, DTS HD, DTS-HD Master Audio, Dolby Digital Plus
Transmission rate	18 Gbps
Screen resolution	4K UHD 50/60 Hz
HDMI Features	18 GBit/s data rate, x.v.Color - Additional Color Space , ARC - Audio Return Channel, 3D TV at 4 K resolution, 3D TV, 32 digital audio channels, High-Speed-HDMI®-cable, 30/36/48-bit Deep Color, HEC - HDMI® with Ethernet channel, CEC 2.0, HDR - High Dynamic Range Image, Dolby Vision
Features	HDCP , 30 years warranty

item no.	Length	Color	EAN	MSRP
118	0.75 m	White	4003635001189	
119	1.50 m	White	4003635001196	
120	2.50 m	White	4003635001202	
126	0.75 m	Black	4003635001264	
127	1.50 m	Black	4003635001271	
128	2.50 m	Black	4003635001288	38.9 €



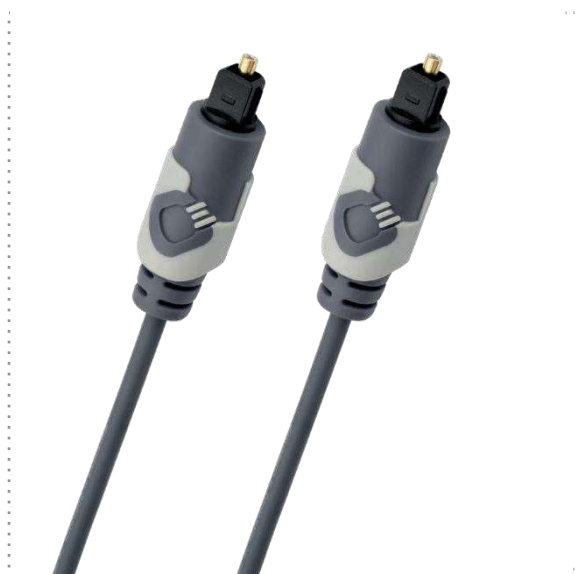

Toslink



SIGNAL DIRECTION



Bi-Directional

OPTICAL DIGITAL CABLE EASY CONNECT OPTO MK II

A well-made and very flexible optical digital cable with high light yield and low refraction index along the fibre-optic conductor.



cable material	plastic, Ultra-thin individual wires
Inner conductor material	Fiber-Optic
cable geometry	Round
Features	30 years warranty, German Technology

item no.	Length	Color	EAN	MSRP
132	1 m	Black	4003635001325	
133	1.50 m	Black	4003635001332	19.9 €

More information:



SCART CABLE

EASY CONNECT SE2000

Audio/video connection with well shielded inner conductors (fully wired) and double overmoulded plugs - 24 carat gold-plated contacts for good corrosion protection

MULTIPLE
SHIELDING

24ct
GOLD

item no.	Length	Color	EAN	MSRP
5702	1.50 m	Black	4003635057025	15.9 €



SCART



Item No. 5702

More information:





INDOOR ANTENNA FOR DVB-T2 FLAT STYLE ONE



The Oehlbach Flat Style One has been developed to enable a sharp and clear reception of digital signals. The development department at Oehlbach has created an antenna that combines state-of-the-art technology with exceptional design. The Flat Style One can be installed within minutes and is easy to use. The antenna features a specially developed receiver system which detects signals through 360 degrees (horizontal and vertical signals). This means no further adjustment is required after the one-off installation process.



DVB® and DVB-T2® are trademarks of the DVB project. The DVB-T2® logo used on this packaging is the property of the DVB project. Use of this logo has been approved by Oehlbach Kabel GmbH. DVB-T2 HD is an initiative of ARD, Medienanstalten, Mediengruppe RTL Deutschland, ProSiebenSat.1 Media SE, VPRT and ZDF. We don't use their logo, we just mention the name „DVB-T2 HD“ so customers know that our device is compatible.



Antenna
plug male



SIGNAL DIRECTION




Uni-Direc-
torate

Reception area	UHF: 470 - 790 MHz
Housing material	More than five Inputs
Scope of delivery	Antenna, power supply, antenna cable 1.8m, amplifier, operating instructions
Mains voltage	5V - 40mA
Transmission standard	DVB-T2
Screen resolution	1080p Full HD
Features	24kt gold plated contacts , antenna with extremely low-noise receiver
Article width	280 mm
Article height	200 mm
Article depth	20 mm

item no.	Color	EAN	MSRP
17208	Black	4003635172087	84.0 €
17209	White	4003635172094	84.0 €

More information:



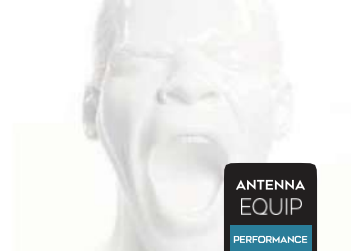

THROW ANTENNA FOR FM

FM WIRE



The high-quality manufactured antenna offers best reception performance in the entire FM range due to the coax plug adapted to 75 Ohm. The mounting holes at the outer end of the antenna allow flexible mounting.

FREQUENCY RANGE
FM
87.5 MHz
- 108 MHz

24ct
GOLD

75Ω

GERMAN
TECHNOLOGY

packaging size	30.00mm / 140.00mm / 100.00mm
Reception area	FM: 88 - 108 MHz
Colour	White
Weight (net)	60 g
Transmission standard	FM
Features	24kt gold plated contacts , German Technology



Antenna
connector
female



item no.	Color	EAN	MSRP
17217	White	4003635172179	15.9 €

Item No. 17217

More information:





4K SIGNAL DISTRIBUTOR FOR HDMI HIGHWAY SPLITTER

If you want to output HDMI® signals in crystal-clear 4k resolution (2160p / Ultra HD) on two devices (such as TVs and beamers) in parallel, you can't avoid the Highway Splitter, a 1:2 HDMI® signal distributor from Oehlbach. High-quality, carefully selected components are housed in a solid metal case and guarantee high-quality signal transmission. 24 carat gold-plated contacts ensure optimum transmission reliability. In addition to video signals, starting from 480i SD signals up to 4k@60Hz (Ultra HD / 2160p), double the Highway Splitter also all common audio formats, be it Dolby Digital, DTS, Dolby True HD, DTS-HD MA, PCM or even DSD (Direct Stream Digital).


HDMI
Socket



SIGNAL DIRECTION



Uni-Direc-
torate

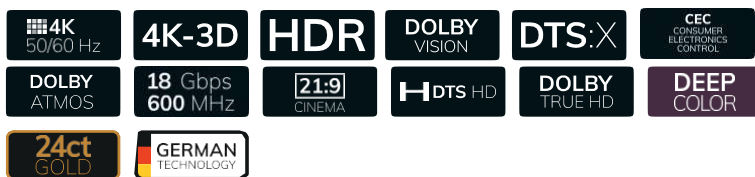

HDMI®
HIGH DEFINITION MULTIMEDIA INTERFACE

The terms HDMI®, HDMI High definition Multimedia Interface® and the HDMI® Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

packaging size	40.00mm / 140.00mm / 225.00mm
Weight (net)	380 g
Colour	Silver
Housing material	Ultra thin single conductors
Scope of delivery	HDMI distributor 1:2, power supply, operating instructions
Air humidity range	0 bis 95 %
Audio format	DTS, Dolby TrueHD, DTS HD, Dolby True HD, Controle LED, Dolby Digital Plus, 5.1 DTS HD, DTS-HD Master Audio, DTS:X, Dolby Pro Logic II, Dolby Atmos, Dolby Digital, DTS-HD High Resolution Audio
Screen resolution	4K UHD 50/60 Hz
HDMI Features	3D TV, 18 GBit/s data rate, HDR - High Dynamic Range Image, Dolby Vision, 3D TV at 4 K resolution, 30/36/48-bit Deep Color, High-Speed-HDMI®-cable
Features	24kt gold plated contacts , German Technology
Input voltage	5 V
Input power	5 W
Input current	1 A

item no.	Color	EAN	MSRP
6048	Silver	4003635060483	89.0 €

Item No. 6048


More information:





4K SIGNAL SWITCH FOR HDMI HIGHWAY SWITCH

With our Highway Switch you can easily switch from 3 input sources (receiver, Blu-Ray player, game console) via remote control and output to your output device (e.g. TV). After the football another round of gambling becomes a child's play. The HDMI®-switch 3:1 with a support of up to 4k (2160p / Ultra HD) guarantees a safe and loss-free transmission of the signal due to its high-quality components and can be operated easily from the sofa due to its remote control in combination with control LEDs. The Highway Switch consists among other things of an aluminum housing, which ensures better shielding against interfering signals. In addition, the 24ct gold-plated HDMI® contacts offer an exceptionally high conductivity and contact reliability.

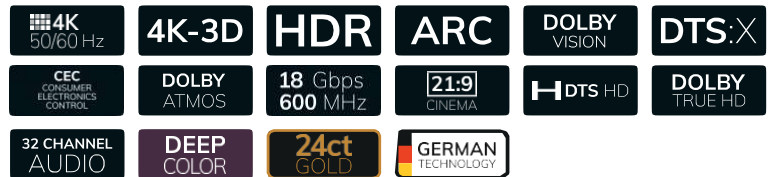

HDMI®
HIGH DEFINITION MULTIMEDIA INTERFACE

The terms HDMI®, HDMI High definition Multimedia Interface® and the HDMI® Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

packaging size	40.00mm / 140.00mm / 225.00mm
Weight (net)	280 g
Colour	Silver
Housing material	Ultra thin single conductors
Scope of delivery	HDMI switch 3:1, power supply, remote control, operating instructions
Air humidity range	0 - 95 %
Audio format	Dolby Pro Logic II, Dolby Digital, Dolby TrueHD, Dolby Digital Plus, Dolby Atmos, DTS, DTS-HD Master Audio, DTS-HD High Resolution Audio, DTS:X, DTS HD, 5.1 DTS HD, Dolby True HD, Control LED
Screen resolution	4K UHD 50/60 Hz
HDMI Features	30/36/48-bit Deep Color, High-Speed-HDMI®-cable, 3D TV at 4 K resolution, Dolby Vision, 32 digital audio channels, 18 GBit/s data rate, 3D TV, ARC - Audio Return Channel, HDR - High Dynamic Range Image
Features	24kt gold plated contacts , German Technology
Input voltage	5 V
Input power	5 W
Input current	1 A

Item No. 6047

More information:





item no.	Color	EAN	MSRP
6047	Silver	4003635060476	79.9 €

Item No. 6047





AUDIO CABLE

I-CONNECT JACK

3.5 MM JACK / 3.5 MM JACK

This i-Connect cable delivers the perfect analogue stereo connection between a portable media player and an audio device with a 3.5 mm jack socket. The cable is equipped with a 3.5 mm jack on both sides. High quality metal connectors with 24 carat gold-plated contact surfaces provide maximum transmission reliability and signal stability. The mother of pearl coloured connectors provide the unobtrusive black cable and the more eye-catching white cable with a unique and elegant finish.

FLEXIBLE MOUNTING

OFC
OXYGEN-FREE COPPER

24ct GOLD

FULL METAL

100% CONTACT

GERMAN TECHNOLOGY

30 YEAR GUARANTEE

Connector material	solid metal plug
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
Features	24kt gold plated contacts , Reliable contact, 30 years warranty, German Technology
cable material	Ultra-thin individual wires, Robust plastic sheathing, plastic

item no.	Length	Color	EAN	MSRP
60011	0.50 m	Black	4003635600115	21.9 €
60013	1.50 m	Black	4003635600139	27.9 €
60015	3 m	Black	4003635600153	
60017	5 m	Black	4003635600177	
60010	0.50 m	White	4003635600108	
60012	1.50 m	White	4003635600122	27.9 €
60014	3 m	White	4003635600146	
60016	5 m	White	4003635600160	

Jack Plug



SIGNAL DIRECTION



Bi-Directional

More information:





AUDIO CABLE I-CONNECT RCA JACK


3.5 JACK ON 2XRCA

This i-Connect cable delivers the perfect analogue stereo connection between a portable media player and a HiFi system. The cable is equipped with a 3.5 mm jack on one side and two RCA connectors on the other. High quality metal connectors with 24 carat gold-plated contact surfaces provide maximum transmission reliability and signal stability. The mother of pearl coloured cable connectors provide the unobtrusive black cable and the more eye-catching white cable with a unique and elegant finish.



Connector material	solid metal plug
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
Shielding	Multiple shielding
Features	24kt gold plated contacts , Reliable contact, 30 years warranty, German Technology
cable material	Robust plastic sheathing, plastic, Ultra-thin individual wires

item no.	Length	Color	EAN	MSRP
60002	1.50 m	Black	4003635600023	35.9 €
60004	3 m	Black	4003635600047	51.9 €
60006	5 m	Black	4003635600061	
60001	1.50 m	White	4003635600016	35.9 €
60003	3 m	White	4003635600030	
60005	5 m	White	4003635600054	

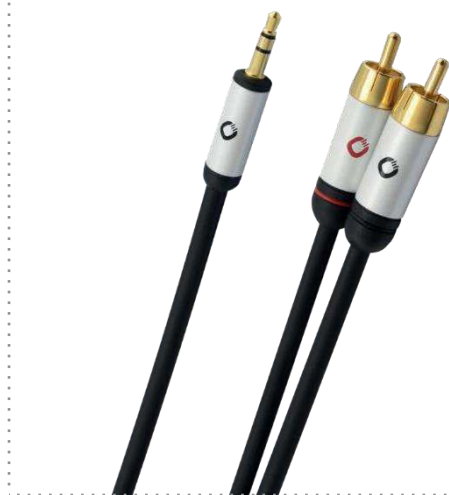

MOBILE JACK ADAPTER

I-JACK AD 35/63

3.5 MM JACK SOCKET / 6.3 MM JACK

Mobile audio adapter, 3.5 mm jack socket to 6.3 mm jack



In the 3-star jack adapter from 3.5mm to 6.3mm, only high-quality materials are used for interference-free and clean signal transmission. The use of high-quality materials and the solid metal plug ensure signal purity and a stable connection. 24 carat gold-plated contacts ensure good transmission reliability and high corrosion protection.


**24ct
GOLD**

packaging size	20.00mm / 140.00mm / 100.00mm
Colour	Gold
Weight (net)	25 g
content	1 piece
Features	Analogue stereo output (3.5 mm jack) for connecting headphones or a stereo system , audio signals redirected 1:1, 24kt gold plated contacts , Perfect for headphones, headphone amplifiers

item no.	Color	EAN	MSRP
35021	Gold	4003635350218	13.9 €



Jack Socket 6.3 mm jack



Item No. 35021





2xCinch



SIGNAL DIRECTION



Bi-Directional

NF AUDIO RCA CABLE

ICE BLUE

Preassembled analogue audio cinch cable for cabling hi-fi and home-cinema systems! The particularly high-quality inner conductor made from oxygen-free copper (OFC) means that the true-to-life transmission of signals can be achieved with this Oehlbach cable. The 24-carat gold-plated plug contacts guarantee contact reliability and protection against corrosion. The cable may be universally used and delivers a neutral sound with good dynamics and spatiality.

MULTIPLE SHIELDING

OFC
oxygen-free copper

24ct GOLD

GERMAN TECHNOLOGY


30YEAR GUARANTEE

Bending radius	35 mm
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
Shielding	Multiple shielding
Shielding construction	1 x aluminium foil + 1 x copper braiding
Features	24kt gold plated contacts , 30 years warranty, German Technology
cable material	Robust plastic sheathing
Cable diameter	2 x 5 mm

item no.	Length	Color	EAN	MSRP
92021	0.50 m	transparent	4003635920213	28.9 €
92020	1 m	transparent	4003635920206	26.9 €
92022	2 m	transparent	4003635920220	42.9 €
92023	3 m	transparent	4003635920237	48.9 €
92025	5 m	transparent	4003635920251	62.4 €

More information:






12" PLATES INNER SLEEVES LP PROTECT

20 PIECES

Protect all your vinyl records reliably from stains, scratches and dirt with these 12 inch Oehlbach LP Protect record sleeves. With a strong grammage of 80 g/m² they offer flexible, reliable protection for all big vinyl treasures. Now you can easily replace old or broken sleeves with the new Oehlbach LP Protect - quantity: 20 pieces.

packaging size	305mm / 10mm / 305mm
Colour	White
Weight (net)	350 g
Features	80g/m ² paper

item no.	Color	EAN	MSRP
2611	White	4003635026113	

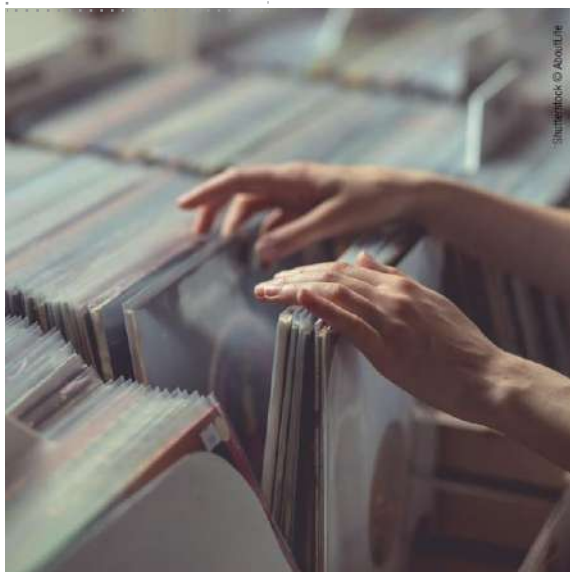

Item No. 2611





NF AUDIO RCA CABLE

NF 1 MASTER

1 PAIR OF AUDIO CABLES

Extremely well-made analogue audio cinch cable for cabling hi-fi and home-cinema systems! The coaxial design and the particularly high-quality inner conductor made from oxygen-free copper (OFC) are responsible for this Oehlbach cable delivering balanced and true-to-life signals. A 24-carat gold-plated metal cinch plug guarantees perfect contact reliability. The cable may be used for all purposes and guarantees a long life thanks to its extremely robust and flexible sheath.

FLEXIBLE
MOUNTING

OFC
OXYGEN-FREE COPPER

24ct
GOLD


FULL
METAL

100%
CONTACT

GERMAN
TECHNOLOGY

30 YEAR
GUARANTEE

Connector material	solid metal plug
Bending radius	30 mm
Inner conductor material	OFC - oxygen-free copper
cable geometry	Flat, Twisted Pair
Shielding	Shielding conductor
Shielding construction	1 x aluminium foil + 1 x copper braiding
Features	Reliable contact, 24kt gold plated contacts , 30 years warranty, German Technology
cable material	Robust plastic sheathing, Ultra-thin individual wires
Cable diameter	2 x 5,5 mm

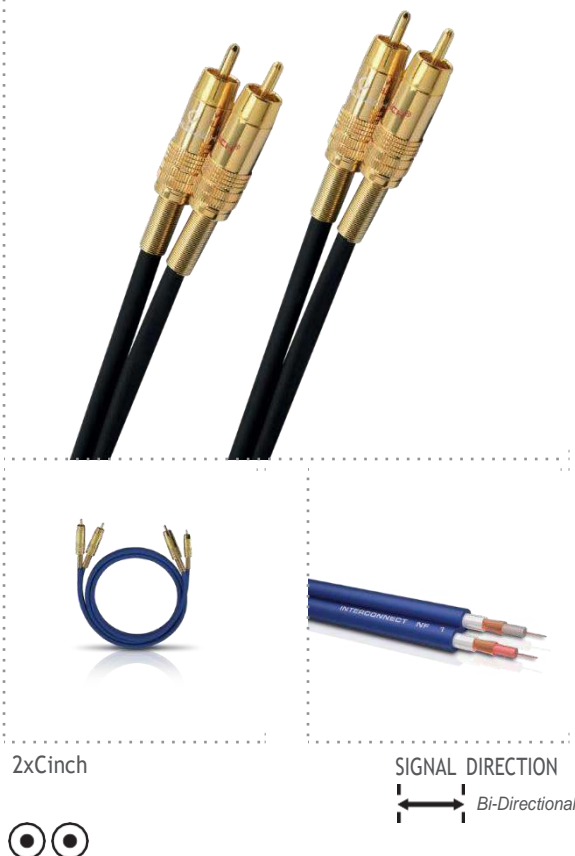

2xCinch

SIGNAL DIRECTION

Bi-Directional

item no.	Length	Color	EAN	MSRP
2028	0.50 m	Black	4003635020289	51.9 €
2029	1 m	Black	4003635020296	61.4 €
2030	0.50 m	White	4003635020302	
2031	1 m	White	4003635020319	
2015	0.50 m	Blue	4003635020159	51.9 €
2032	1 m	Blue	4003635020326	61.4 €
2035	2 m	Blue	4003635020357	70.4 €
2036	3 m	Blue	4003635020364	79.4 €
2038	5 m	Blue	4003635020388	99.0 €
2039	10 m	Blue	4003635020395	151.0 €

More information:





DIGITAL AUDIO RCA CABLE

NF 113 DI

Excellently made preassembled digital-electrical audio cinch cable with signal alignment for cabling hi-fi and home-cinema systems. The constant impedance of 75 ohm and the particularly high-quality inner conductor made from oxygen-free copper (OFC) mean that the particularly stable and true-to-life transmission of signals can be achieved with this Oehlbach cable. A 24-carat gold-plated cinch plug guarantees perfectly reliable contact and pleasant handling. The robust and flexible outer sheath makes this cable fit for all purposes while simultaneously guaranteeing long life spans.



MULTIPLE
SHIELDING

SPOFC
COPPER

24ct
GOLD

FULL
METAL

75Ω

100%
CONTACT

GERMAN
TECHNOLOGY

30YEAR
GUARANTEE

cable material	plastic, Robust plastic sheathing
Connector material	solid metal plug
Characteristic impedance	Eliminates high-frequency irradiation
Bending radius	20 mm
Inner conductor material	SPC/OFC - silver-plated oxygen-free copper
cable geometry	Round
Shielding	Multiple shielding
Features	24kt gold plated contacts , Reliable contact, 30 years warranty, German Technology
Cable diameter	5,5 mm

item no.	Length	Color	EAN	MSRP
2064	0.50 m	Blue	4003635020647	
2065	1 m	Blue	4003635020654	41.9 €
10701	1.50 m	Blue	4003635107010	
10702	2 m	Blue	4003635107027	
10703	3 m	Blue	4003635107034	
10705	5 m	Blue	4003635107058	
107010	10 m	Blue	4003635070109	
107015	15 m	Blue	4003635070154	

More information:




SUBWOOFER CINCH CABLE

NF SUB

Preassembled subwoofer cable for connecting active subwoofers to home-cinema systems! Just the thing for connecting active subwoofers to AV receivers. The inner conductor's large diameter and the coaxial design mean that this Oehlbach cable is particularly suitable for the transmission of low frequencies. The inner conductor made from oxygen-free OFC copper also guarantees absolutely precise and powerful bass reproduction. The effective copper-braid shielding eliminates any occurring signal interference and guarantees perfect transmission quality. The subwoofer cable is extremely flexible in spite of its being very robust and also comes with solid plugs that are responsible for creating the optimum contact.



Bending radius	45 mm
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
Shielding	Multiple shielding
Features	24kt gold plated contacts , 30 years warranty, Reliable contact, German Technology
cable material	Ultra-thin individual wires, Robust plastic sheathing
Cable diameter	7,0 mm

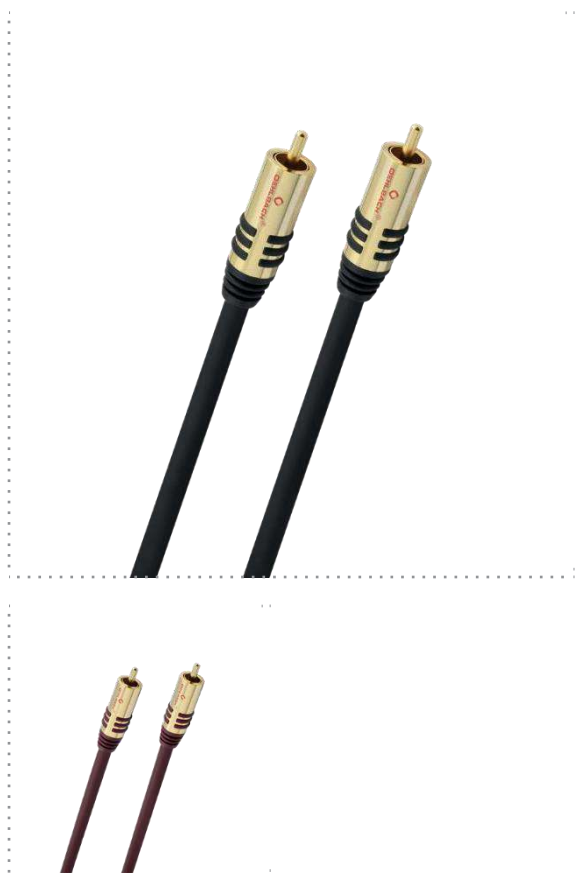

item no.	Length	Color	EAN	MSRP
20531	1 m	Bordeaux	4003635205310	24.9 €
20532	2 m	Bordeaux	4003635205327	35.4 €
20533	3 m	Bordeaux	4003635205334	40.4 €
20535	5 m	Bordeaux	4003635205358	55.9 €
20538	8 m	Bordeaux	4003635205389	63.9 €
21531	1 m	Black	4003635215319	
21532	2 m	Black	4003635215326	35.4 €
21533	3 m	Black	4003635215333	40.4 €
21535	5 m	Black	4003635215357	55.9 €
21538	8 m	Black	4003635215388	63.9 €
21540	10 m	Black	4003635215401	101.0 €





SUBWOOFER Y-RCA CABLE

NF Y-SUB

Preassembled Y-subwoofer cable for connecting active subwoofers to home-cinema systems! Just the thing for connecting active subwoofers (stereo input) to AV receivers (mono output). The inner conductor's large diameter and the coaxial design mean that this Oehlbach cable is particularly suitable for the transmission of low frequencies. The inner conductor made from oxygen-free OFC copper also guarantees absolutely precise and powerful bass reproduction. The effective copper-braid shielding eliminates any occurring signal interference and guarantees perfect transmission quality. Absolute signal stability is also guaranteed by the solid plugs that are responsible for creating the optimum contact on this highly flexible cable.



Connector material	solid metal plug
Bending radius	30 mm
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
Shielding	Multiple shielding
Features	24kt gold plated contacts , 30 years warranty, German Technology
cable material	Robust plastic sheathing, plastic
Cable diameter	2 x 5 mm



item no.	Length	Color	EAN	MSRP
20561	1 m	Purple	4003635205617	36.4 €
20562	2 m	Purple	4003635205624	42.9 €
20563	3 m	Purple	4003635205631	50.9 €
20565	5 m	Purple	4003635205655	64.9 €
20567	8 m	Purple	4003635205679	94.0 €






RESONANCE DAMPER

ONE FOR ALL



item no.	Color	EAN	MSRP
55035	Black	4003635550359	2.5 €
55135	Black	4003635551356	9.9 €



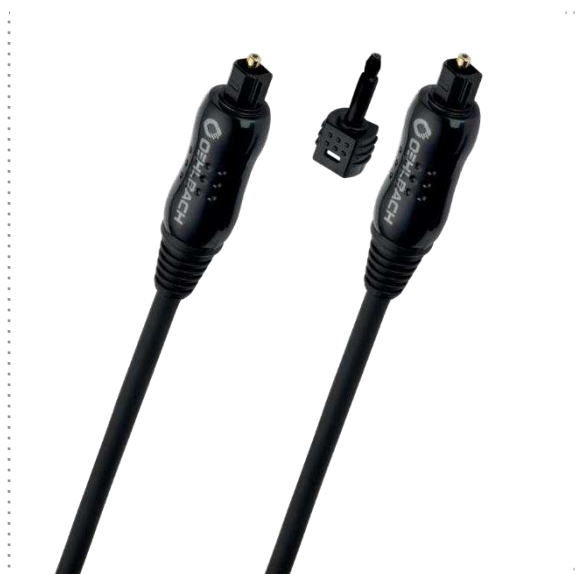

Toslink



SIGNAL DIRECTION



Bi-Directional

OPTICAL DIGITAL CABLE

OPTO STAR BLACK

A high-quality and very flexible optical digital cable with very high light yield and low refraction index along the fibre-optic conductor. Including one TOSLINK adapter to 3.5 fibre-optical audio jack for easily connecting to portable reproduction devices.

FLEXIBLE
MOUNTING

24ct
GOLD

100%
CONTACT

30 YEAR
GUARANTEE

cable material	plastic, Ultra-thin individual wires, Robust plastic sheathing
Bending radius	35 mm
Inner conductor material	Fiber-Optic
cable geometry	Round
Features	30 years warranty, 24kt gold plated contacts , Reliable contact
Cable diameter	5 mm

item no.	Length	Color	EAN	MSRP
----------	--------	-------	-----	------

66101	0.50 m	Black	4003635661017	
66102	1 m	Black	4003635661024	36.9 €
66103	1.50 m	Black	4003635661031	39.9 €
66104	2 m	Black	4003635661048	42.9 €
66105	3 m	Black	4003635661055	51.9 €
66106	4 m	Black	4003635661062	54.9 €
66107	5 m	Black	4003635661079	60.9 €
66108	6 m	Black	4003635661086	68.9 €
66109	8 m	Black	4003635661093	
66110	10 m	Black	4003635661109	
66111	15 m	Black	4003635661116	

More information:





PHONO PREAMPLIFIER FOR MM / MC

PHONO PREAMP PRO

The Phono PreAmp Pro from Oehlbach integrates your turntable with MM or MC pickup into existing high-quality HiFi components without a dedicated phono input. The low-noise preamplifier is equipped with gold-plated contacts and guarantees a stable and secure connection between the phono unit and the hi-fi system. Equipped with an external power supply, the Phono PreAmp Pro weighs just 100g and, thanks to its compact design, can easily fit into any hi-fi rack. The individual components are connected via analog stereo RCA connectors.



Impedance	(MM) 50 Ohm (MC) 100 Ohm, (MM) 5mV / (MC) 0,5mV Ohm
packaging size	40.00mm / 140.00mm / 225.00mm
Weight (net)	565 g
Colour	Metallic Brown
Housing material	Ultra thin single conductors
Scope of delivery	Phono PreAmp, power supply, operating instructions
Air humidity range	5-90 %
Features	24kt gold plated contacts , 100% contact reliability, For moving magnet/ moving coil pickups
Input voltage	18 V
Input power	2,7 W
Input current	0,15 A

item no.	Color	EAN	MSRP
6060	metallic brown	4003635060605	109.0 €



PANEL WEIGHT PHONO WEIGHT



This little black one must not be missing in any record cabinet. The Oehlbach Phono Weight record weight gives all your records the right pressure so that they lie firmly and vibration-free on the turntable and can unfold their full sound undisturbed. A solid 420 grams of weight packed in a black aluminium alloy make the audible difference. A soft pad protects the labels and records at all times. Simply a round thing for better sound and more precise basses: the Oehlbach Phono Weight platter weight.

packaging size	80mm / 40mm / 80mm
Colour	Black
Weight (net)	420 g

item no.	Color	EAN	MSRP
2612	Black	4003635026120	42.9 €



Item No. 2612





C7 CEE7/16



POWER SUPPLY CABLE POWERCORD C7

WITH EU FLAT PLUG AND C7 COUPLING

Oehlbach universal mains cable with Euro flat plug and small appliance coupler, equipped with inner conductor material made of high-purity, oxygen-free OFC copper. A variety of small electrical and multimedia devices are connected to the mains via this reliable cable. With a length of 1.5 m to 5.0 m, this optional black or white cable also connects your terminal device to the mains. The moulded plugs and the 24 carat gold-plated contacts guarantee a long service life and excellent contact reliability.



Inner conductor material	OFC - oxygen-free copper
cable cross section	2 x 0.75 mm ²
Features	VDE-tested, 30 years warranty

item no.	Length	Color	EAN	MSRP
17046	1.50 m	Black	4003635170465	22.4 €
17047	3 m	Black	4003635170472	24.9 €
17048	5 m	Black	4003635170489	31.4 €
17049	1.50 m	White	4003635170496	22.4 €
17050	3 m	White	4003635170502	
17051	5 m	White	4003635170519	



DESIGN SOCKET STRIP

POWERSOCKET 505

The Oehlbach Powersocket 505 is a high quality multiple socket strip with solid aluminium housing. With the help of the 1.5m power cable supplied and the six individual slots, numerous devices at the central entertainment location can be supplied with power in a stable and secure manner. Thanks to the compact design, the bar can be set up flexibly and without any problems. The safety sockets, which are fitted with a child safety lock, are also arranged at a 45° angle for easy insertion and re-insertion. For multimedia devices, smartphones and tablets, the Powersocket 505 also offers two USB charging sockets integrated on the side with a total charging current of up to 2.4 amps. The socket strip is switched on and off via an illuminated safety switch.



packaging size	100mm / 185mm / 700mm
Colour	Anthracite
Housing material	Brushed aluminium / plastic
Weight (net)	720 g
Scope of delivery	Power strip, power cable C13 1.5 meter black, operating instructions
Features	6 safety sockets arranged at a 45° angle with child safety feature, Two USB charging sockets with 2.4 amp charging current, quick wall mounting, Gold-plated contacts for perfect signal transmission, German Technology

item no.	Color	EAN	MSRP
17010	Anthracite	4003635170106	69.9 €



Item No. 17010



More information:

MULTIPLE SOCKET STRIP

POWERSTATION 909



OEHLBACH's Powerstation 909 is a perfectly made multiple plug socket designed as a 19" rack / table version that will satisfy even the highest of demands made at the top end of the segment. It possesses a total of eight individual sockets - four digital (filtered) and four analogue (unfiltered) plug sockets. Also, two separate plug-socket groups consisting of two filtered and unfiltered plug sockets each may be switched individually. The Powerstation 909 possesses phase marks at each individual plug socket and the correct connections are indicated by a red control lamp in order to ensure that the equipment's phases are properly connected. This is the only way to effectively prevent potential-equalization currents from interfering with audio and image data. This exceptional plug socket has also been equipped with a delay function (three seconds) for the mains switch to prevent unpleasant current peaks when it is switched on. The display which may be switched off and which has been embedded in the solid aluminium front panel provides users with information about power consumption and the voltage at the time. The inner conductor's cross-section of 3.3 mm², which has been made from highly pure oxygen-free copper, constitutes genuine high-end inner cabling and will guarantee stable power supplies in any situation - even for components with high power requirements.

Power cord supplied with the delivery.




packaging size	443mm / 305mm / 120mm
cable cross section	3.3 mm ²
Housing material	Safety plug (CEE7/7) IEC cord connector (C13)
Scope of delivery	Power station, power cable 1.5m, mounting bracket 19" rack, operating instructions
Features	Delay-function, 24kt gold plated contacts, 2 USB sockets for charging devices, 100% contact reliability
Inner conductor material	OFC - oxygen-free copper

item no.	Color	EAN	MSRP
13050	Black	4003635130506	769.00 €
13051	Silver	4003635130513	769.00 €



More information:

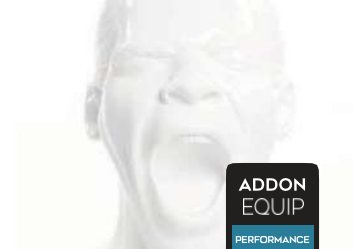

RECORD BRUSH

PRO PHONO BRUSH



Dust on records and in the record grooves no longer has a chance of spoiling the listening pleasure of your favourite records. With the Oehlbach Pro Phono Brush record brush you can wipe it away quickly and gently for the records. An ergonomically shaped stainless steel handle gives you perfect control with every movement. Soft brushes made of durable nylon in a real wood insert then clean the record and grooves as gently as reliably from dust and other small impurities for an undisturbed sound experience. Don't let just any brush touch your valuable record collection. Leave your vinyl to just one - the Oehlbach Pro Phono Brush record brush.

STAINLESS
STEEL



packaging size	20.00mm / 140.00mm / 100.00mm
Colour	Silver
Weight (net)	42 g
Features	Real wood, Stainless steel
Article width	116 mm
Article height	47 mm
Article depth	14 mm

item no.	Color	EAN	MSRP
2614	Silver	4003635026144	



Item No. 2614



More information:



OPTICAL DIGITAL CABLE RED OPTO STAR

Optodigital audio connection ready-made with two Toslink plugs incl. adapter to 3.5 mm. The innovative design of the cable with ultra-fast optical fibres achieves the highest luminosity and enables a data transmission rate of 45 Mbps (megabits/second). The standard for the transmission of multi-channel audio formats via optical Toslink interfaces only stipulates a transmission rate of 12.8 Mbps!



cable material	Robust plastic sheathing, Ultra-thin individual wires
Inner conductor material	Fiber-Optic
cable geometry	Round
Features	Including adapter to 3.5 mm, 30 years warranty, German Technology

Toslink



SIGNAL DIRECTION





item no. Length Color EAN MSRP

6002	0.50 m	Black	4003635060025	
6003	1 m	Black	4003635060032	34.9 €
6004	1.50 m	Black	4003635060049	37.9 €
6005	2 m	Black	4003635060056	40.9 €
6006	4 m	Black	4003635060063	52.9 €
6007	5 m	Black	4003635060070	
6008	6 m	Black	4003635060087	
6009	8 m	Black	4003635060094	
6010	10 m	Black	4003635060100	
6012	15 m	Black	4003635060124	

More information:



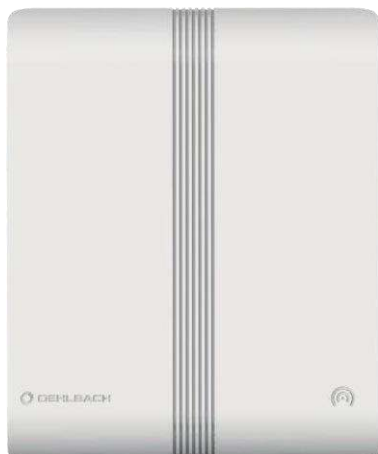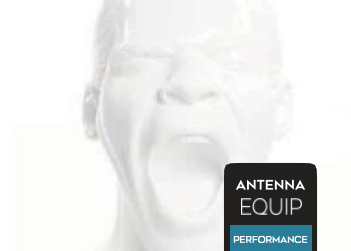

INDOOR ANTENNA FOR DAB+ SCOPE AUDIO

Small dimensions, big reception - that is the Oehlbach indoor antenna Scope Audio. With a powerful, newly developed receiver unit, it brings digital DAB+ radio in outstanding quality to all receivers with separate antenna connection. With its modern, timeless design, it cuts a fine figure everywhere. The Scope Audio is a compact, slim active radio antenna with adjustable amplifier power on the rear panel to adjust and optimise reception depending on location. The antenna is powered by a supplied USB power supply unit via a 1.8 metre long Y-connection cable with an integrated 24 carat gold-plated antenna plug. The Scope Audio indoor antenna is available in two colours: black or white.

FREQUENCY RANGE
DAB+ 174 MHz - 230 MHz

24ct
GOLD

75Ω


GERMAN
TECHNOLOGY

Reception area	VHF: 174 - 230 MHz
cable length	1.80 m
Housing material	More than five Inputs
Weight (net)	330 g
Scope of delivery	Antenna with USB/antenna cable 1.8m, power supply, operating instructions
Transmission standard	DAB+
Features	German Technology, antenna with extremely low-noise receiver, Adjustable amplifier, 24kt gold plated contacts
Article width	140 mm
Article height	170 mm
Article depth	22 mm

Antennas USB A
F-con-
nector




SIGNAL DIRECTION



item no.	Color	EAN	MSRP
17225	Black	4003635172254	43.9 €
17226	White	4003635172261	43.9 €





INDOOR ANTENNA FOR DAB+ SCOPE AUDIO MAX

The Oehlbach Scope Audio Max is the indoor antenna for all those who want more - more quality radio listening. It is a radio antenna like no other. Its futuristic design makes it a unique active indoor antenna for digital DAB+ radio. For excellent reception in any location, you can easily and quickly adjust the amplifier power on the rear panel. With a 24 carat gold-plated antenna plug on a 1.8 metre long antenna cable, the Scope Audio Max provides high-quality connection to all radios with external antenna input. A USB power supply unit is included for power supply. You can choose the colour - black or white for your Oehlbach Scope Audio Max indoor antenna.

FREQUENCY RANGE
DAB+ 174 MHz - 230 MHz

24ct
GOLD

75Ω


GERMAN
TECHNOLOGY

Reception area	VHF: 174 - 230 MHz
cable length	1.80 m
Housing material	More than five Inputs
Weight (net)	418 g
Scope of delivery	Antenna with USB/antenna cable 1.8m, power supply, operating instructions
Transmission standard	DAB+
Features	German Technology, 24kt gold plated contacts , Adjustable amplifier
Article width	80 mm
Article height	445 mm
Article depth	102 mm



item no.	Color	EAN	MSRP
17227	Black	4003635172278	62.9 €
17228	White	4003635172285	62.9 €



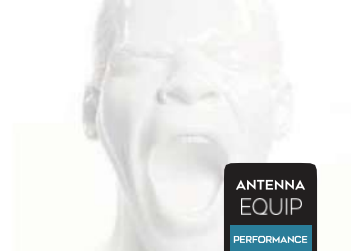

INDOOR ANTENNA FOR DVB-T2 SCOPE FLAT

Excellent reception of digital terrestrial television DVB-T2 always requires a suitable antenna: one like the Oehlbach Scope Flat. In this DVB-T2 indoor antenna, newly developed, particularly low-noise reception technology ensures picture and sound quality that can be seen and heard. You can place this active antenna completely flat on a cupboard and it will not be noticed at all. Or you can hang the elegant design - available in black or white - on the next wall like a picture frame. A 1.8 metre antenna cable with a 24 carat gold-plated antenna plug gives you plenty of room to find the perfect spot for this antenna.



DVB-T2 HD is an initiative of ARD, Medienstalten, Mediengruppe RTL Deutschland, ProSiebenSat.1 Media SE, VPRT and ZDF. We don't use their logo, we just mention the name „DVB-T2 HD“ so customers know that our device is compatible. DVB® and DVB-T2® are trademarks of the DVB project. The DVB-T2® logo used on this packaging is the property of the DVB project. Use of this logo has been approved by Oehlbach Kabel GmbH.

Reception area	UHF: 470 - 790 MHz
cable length	1.80 m
Weight (net)	530 g
Scope of delivery	Antenna with USB/antenna cable 1.8m, power supply, operating instructions
Transmission standard	DVB-T2
Screen resolution	1080p Full HD
Features	24kt gold plated contacts , German Technology
Article width	303 mm
Article height	27 mm
Article depth	270 mm



Antenna plug male



USB A



SIGNAL DIRECTION




Uni-Direc-
torate



item no.	Color	EAN	MSRP
17231	Black	4003635172315	62.9 €
17232	White	4003635172322	62.9 €

More information:






INDOOR ANTENNA FOR DVB-T2 SCOPE OMEGA

Powerful reception technology for digital terrestrial television DVB-T2 and exceptional design are combined in this Oehlbach Scope Omega indoor antenna in a unique way. With its newly developed reception technology, it ensures outstanding picture or sound quality and at the same time sets a strong optical accent next to any TV or receiver. The Oehlbach Scope Omega is an antenna for everyone who is looking for something special. It offers proven Oehlbach quality with high-quality technology up to the 24 carat gold-plated antenna plug. A 1.8 metre long antenna cable makes it flexible so that you can always find the ideal place for the antenna. The Scope Omega DVB-T2 indoor antenna is available in black or white.



DVB® and DVB-T2® are trademarks of the DVB project. The DVB-T2® logo used on this packaging is the property of the DVB project. Use of this logo has been approved by Oehlbach Kabel GmbH. DVB-T2 HD is an initiative of ARD, Medienanstalten, Mediengruppe RTL Deutschland, ProSiebenSat.1 Media SE, VPRT and ZDF. We don't use their logo, we just mention the name „DVB-T2 HD“ so customers know that our device is compatible.

Reception area	UHF: 470 - 790 MHz
cable length	1.80 m
Weight (net)	406 g
Scope of delivery	indoor antenna, power supply unit, operating instructions
Transmission standard	DVB-T2
Screen resolution	1080p Full HD
Features	24kt gold plated contacts
Article width	157 mm
Article height	242 mm
Article depth	74 mm



DVB-T2 ZIMMERANTENNE SCOPE OMEGA



item no.	Color	EAN	MSRP
17233	Black	4003635172339	62.9 €
17234	White	4003635172346	62.9 €





INDOOR ANTENNA FOR DVB-T2 SCOPE OVAL

The Oehlbach Scope Oval indoor antenna for digital terrestrial television DVB-T2 dresses newly developed high-performance reception technology in a harmonious soft design. On a 1.8 metre long antenna cable with 24 carat gold-plated antenna plug, you can place this antenna very flexibly around your TV or receiver. A USB power supply unit is included for the power supply. With this antenna you can experience picture and sound and the whole DVB-T2 channel variety with many programs in HD on a whole new level. And in the colours black or white, this compact Oehlbach indoor antenna also fits into the picture optically always and everywhere.



DVB-T2 HD is an initiative of ARD, Medienstalten, Mediengruppe RTL Deutschland, ProSiebenSat.1 Media SE, VPRT and ZDF. We don't use their logo, we just mention the name „DVB-T2 HD“ so customers know that our device is compatible. DVB* and DVB-T2* are trademarks of the DVB project. The DVB-T2* logo used on this packaging is the property of the DVB project. Use of this logo has been approved by Oehlbach Kabel GmbH.

packaging size	86mm / 300mm / 76mm
Reception area	UHF: 470 - 790 MHz
cable length	1.80 m
Weight (net)	490 g
Scope of delivery	Antenna with USB/antenna cable 1.8 m, power supply, operating instructions
Transmission standard	DVB-T2
Screen resolution	1080p Full HD
Features	Adjustable amplifier, German Technology, 24kt gold plated contacts
Article width	300 mm
Article height	76 mm
Article depth	86 mm

item no.	Color	EAN	MSRP
17229	Black	4003635172292	52.9 €
17230	White	4003635172308	52.9 €





INDOOR ANTENNA FOR DVB-T2 / DAB+ SCOPE VISION



The Oehlbach Scope Vision DVB-T2 antenna is designed for optimum reception with an extremely low-noise receiver and is ideally suited to current DVB-T2 HD and DVB-T stations. The power supply is provided conveniently via any USB port on your TV, PC or with the power adapter provided. The possibility to position the antenna horizontally or vertically and the extra-long 1.8 m cable ensure a high level of flexibility. Wall mounting is also possible, of course. 24 carat gold-plated contacts guarantee high contact reliability

24ct
GOLD

75Ω

FULL HD

DVB-T2 HD

DVB-T2

DVB® and DVB-T2® are trademarks of the DVB project. The DVB-T2® logo used on this packaging is the property of the DVB project. Use of this logo has been approved by Oehlbach Kabel GmbH. DVB-T2 HD is an initiative of ARD, Medienanstalten, Mediengruppe RTL Deutschland, ProSiebenSat.1 Media SE, VPRT and ZDF. We don't use their logo, we just mention the name „DVB-T2 HD“ so customers know that our device is compatible.



Antenna plug male



USB A



SIGNAL DIRECTION



Uni-Directorate

packaging size	118mm / 205mm / 14mm
Reception area	UHF: 470 - 790 MHz
Housing material	More than five Inputs
Scope of delivery	Antenna with USB/antenna cable 1.8m, USB power supply, metal stand, operating instructions
Mains voltage	5V - 40mA
Transmission standard	DVB-T2
Screen resolution	1080p Full HD
Features	Can be positioned horizontally or vertically, Power supply possible via any USB port (television or desktop computer), 24kt gold plated contacts , antenna with extremely low-noise receiver

item no.	Color	EAN	MSRP
17216	White	4003635172162	55.9 €
17223	Black	4003635172230	55.9 €

More information:





OUTDOOR ANTENNA FOR DVB-T2 HD

SCOPE VISION OUTDOOR



Antenna
plug male



SIGNAL DIRECTION



Uni-Direc-
torate



The Oehlbach Scope Vision Outdoor has been specially designed for outdoor installation and is equipped with an especially low-noise amplifier developed especially for this antenna. This guarantees the best possible reception of DVB-T2 HD signals. The antenna is also flexible when it comes to installation and can be placed on a mast, on the wall, or simply on a horizontal surface with its base. The waterproof and UV-resistant housing protects the high-quality interior components in bad weather conditions.



DVB-T2 HD is an initiative of ARD, Medienanstalten, Mediengruppe RTL Deutschland, ProSiebenSat.1 Media SE, VPRT and ZDF. We don't use their logo, we just mention the name „DVB-T2 HD“ so customers know that our device is compatible. DVB* and DVB-T2* are trademarks of the DVB project. The DVB-T2* logo used on this packaging is the property of the DVB project. Use of this logo has been approved by Oehlbach Kabel GmbH.

packaging size	60mm / 160mm / 310mm
Reception area	UHF: 470 - 790 MHz
Colour	White
Housing material	More than five Inputs
Weight (net)	1060 g
Scope of delivery	Antenna, power supply, antenna cable 10m, amplifier, operating instructions
Transmission standard	DVB-T2
Screen resolution	1080p Full HD
Features	Waterproof and UV-resistant housing, 24kt gold plated contacts

item no.	Color	EAN	MSRP
17221	White	4003635172216	94.9 €

Item No. 17221





RESONANCE DAMPER SHOCK ABSORBER



item no.	Color	EAN	MSRP
55038	Black	4003635550380	4.4 €
55138	Black	4003635551387	26.4 €
55838	Black	4003635558386	
62013	Black	4003635620137	
62014	Black	4003635620144	





SPEAKER CABLES

SPEAKER WIRE SP-7

2 X 0.75 MM²



Excellently made stereo loudspeaker cable wound on to a mini coil. This loudspeaker cable is suitable for amplifier performances of up to around 70 watts of power per amplifier channel. The use of oxygen-free copper (OFC) as the conducting material ensures that an extremely clear and true-to-life sound can be achieved with this loudspeaker cable. The cable has also been made from very many ultrathin stranded copper wires - each individual wire possesses a cross-section of around 0.20 mm. This complex design means that the cable is particularly conductive and flexible throughout.



Terminal



SIGNAL DIRECTION



Bending radius	10 mm
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
cable cross section	2 x 0.75 mm ²
Features	For amplifier performances of up to 70 watts, 30 years warranty, Stereo speaker cable
cable material	plastic

item no.	Length	Color	EAN	MSRP
201	10 m	transparent	4003635002018	15.9 €
202	20 m	transparent	4003635002025	29.9 €
205	30 m	transparent	4003635002056	
206	10 m	White	4003635002063	
207	20 m	White	4003635002070	
208	30 m	White	4003635002087	

More information:



SPEAKER CABLES

SPEAKER WIRE SP-15

2 X 1.5 MM²



Excellently made stereo loudspeaker cable wound on to a mini coil. This loudspeaker cable is suitable for amplifier performances of up to around 90 watts of power per amplifier channel. The use of oxygen-free copper (OFC) as the conducting material ensures that an extremely clear and true-to-life sound can be achieved with this loudspeaker cable. The cable has also been made from very many ultrathin stranded copper wires - each individual wire possesses a cross-section of around 0.125 mm. This complex design means that the cable is particularly conductive and flexible throughout.

» 90 W **OFC** OXYGEN FREE COPPER **30 YEAR GUARANTEE**

Terminal



SIGNAL DIRECTION



Bi-Directional

Bending radius	15 mm
Colour	Transparent
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
cable cross section	2 x 1.5 mm ²
Features	30 years warranty, For amplifier performances of up to 90 watts, Stereo speaker cable
cable material	plastic

item no.	Length	Color	EAN	MSRP
101	10 m	transparent	4003635001011	27.9 €
105	20 m	transparent	4003635001059	50.9 €
107	30 m	transparent	4003635001073	71.9 €
191	10 m	transparent	4003635001912	27.9 €
195	20 m	transparent	4003635001950	50.9 €
197	30 m	transparent	4003635001974	

More information:





SPEAKER CABLES

SPEAKER WIRE SP-25

2 X 2.5 MM²



Excellently made stereo loudspeaker cable wound on to a mini coil. This loudspeaker cable is suitable for amplifier performances of up to around 120 watts of power per amplifier channel. The use of oxygen-free copper (OFC) as the conducting material ensures that an extremely clear and true-to-life sound can be achieved with this loudspeaker cable. The cable has also been made from very many ultrathin stranded copper wires - each individual wire possesses a cross-section of around 0.125 mm. This complex design means that the cable is particularly conductive and flexible throughout.

» 120 W

OFC
OXYGEN FREE
COPPER

30 YEAR
GUARANTEE

Terminal



SIGNAL DIRECTION



Bi-Directional

Bending radius	18 mm
Colour	Crystal clear
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
cable cross section	2 x 2.5 mm ²
power max.	For amplifier performances of up to 120 watts
Features	Stereo speaker cable , 30 years warranty
cable material	plastic

item no.	Length	Color	EAN	MSRP
102	10 m	Crystal clear	4003635001028	39.9 €
106	20 m	Crystal clear	4003635001066	69.9 €
108	30 m	Crystal clear	4003635001080	105.9 €
192	10 m	Crystal clear	4003635001929	39.9 €
196	20 m	Crystal clear	4003635001967	68.9 €
198	30 m	Crystal clear	4003635001981	

More information:





SPEAKER CABLES

SPEAKER WIRE SP-40

2 X 4.0 MM²

Excellently made stereo loudspeaker cable wound on to a mini coil. This loudspeaker cable is suitable for amplifier performances of up to around 180 watts of power per amplifier channel. The use of oxygen-free copper (OFC) as the conducting material ensures that an extremely clear and true-to-life sound can be achieved with this loudspeaker cable. The cable has also been made from very many ultrathin stranded copper wires - each individual wire possesses a cross-section of around 0.10 mm. This complex design means that the cable is particularly conductive and flexible throughout.

» 180 W

OFC
OXYGEN-FREE
COPPER

30 YEAR
GUARANTEE

Terminal



SIGNAL DIRECTION






Bi-Directional

Bending radius	25 mm
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
cable cross section	2 x 4.0 mm ²
power max.	For amplifier performances of up to 180 watts
Features	30 years warranty, Stereo speaker cable
cable material	plastic

item no.	Length	Color	EAN	MSRP
301	10 m	transparent	4003635003015	71.9 €
302	20 m	transparent	4003635003022	129.9 €
305	30 m	transparent	4003635003053	
306	10 m	White	4003635003060	
307	20 m	White	4003635003077	
308	30 m	White	4003635003084	

More information:



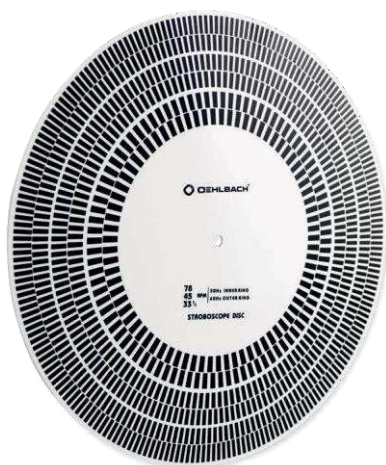

STROBOSCOPE DISC SPEED CHECK

With the Oehlbach Speed Check Stroboscope Disc you get an exact tool to check the platter speed of your turntable and tune it to maximum sound. A Speed Check is very easy to perform under lighting with 50 or 60 Hz mains frequency. The exact scaling on the Oehlbach Speed Check Stroboscope Disc shows you immediately and reliably whether the turntable of your turntable always maintains the respective speed of 33 1/3, 45 or even 78 revolutions per minute.

packaging size	300mm / 3mm / 300mm
diameter	29,7 cm mm
Colour	White
Weight (net)	100 g
Article height	3 mm


item no.	Color	EAN	MSRP
2615	White	4003635026151	19.9 €



Item No. 2615

More information:



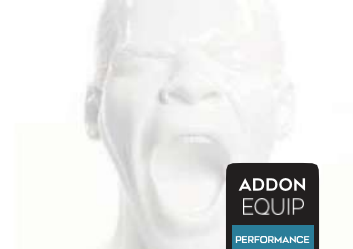

TONEARM BALANCE TRACKING FORCE

For the perfect enjoyment of a record, fractions of a gram are required. Even the slightest deviation from the optimum contact force of the sound carrier of your turntable makes audible differences in sound. Oehlbach has developed the Tracking Force Tonearm Balance so that you can easily find the ideal tuning of your device. Under a stainless steel front it works digitally with the highest precision and an accuracy of ± 0.01 grams. The Oehlbach Tracking Force Tonearm Balance makes it easy for you to balance a tonearm weight - with simple operation, convenient control buttons and a large, easy-to-read display.

STAINLESS STEEL


packaging size	40.00mm / 140.00mm / 225.00mm
Weight (net)	160 g
Colour	Silver
Housing material	More than five Inputs, Stainless steel
Scope of delivery	Balance, Operating Instructions
Air humidity range	5 - 90 %

item no.	Color	EAN	MSRP
2610	Silver	4003635026106	39.9 €



Item No. 2610



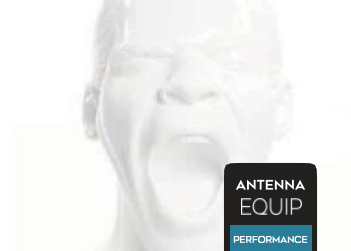

ANTENNA CABLE

TRANSMISSION PLUS

Prefabricated digital antenna cable for transmitting high-definition audio and image data. The inner conductor used in this very well-made antenna cable is manufactured from oxygen-free copper (OFC); its fourfold shielding means that it is particularly suited for the transmission of sensitive HDTV signals!



cable material	PVC
Bending radius	ca. 30 mm
Inner conductor material	OFC - oxygen-free copper
cable geometry	Round
Shielding effectiveness	120 dB dB
Shielding	Quadruple shielding
Shielding construction	2 x aluminium foil + 2 x copper braiding
Features	Reliable contact, 30 years warranty, 24kt gold plated contacts , German Technology
Characteristic impedance	Eliminates high-frequency irradiation



item no.	Length	Color	EAN	MSRP
2816	0.75 m	White	4003635028162	36.4 €
2817	1.20 m	White	4003635028179	40.4 €
2810	1.70 m	White	4003635028100	42.9 €
2811	2.20 m	White	4003635028117	54.9 €
2812	3.20 m	White	4003635028124	64.9 €
2813	5.10 m	White	4003635028131	86.00 €
2814	7.50 m	White	4003635028148	115.00 €
2815	10 m	White	4003635028155	142.00 €
2820	1.70 m	Silver	4003635028209	
2821	2.20 m	Silver	4003635028216	
2822	3.20 m	Silver	4003635028223	
2823	5.10 m	Silver	4003635028230	
2824	7.50 m	Silver	4003635028247	
2825	10 m	Silver	4003635028254	





USB 2.0 CABLE TYPE A TO TYPE B


USB PRIMUS B

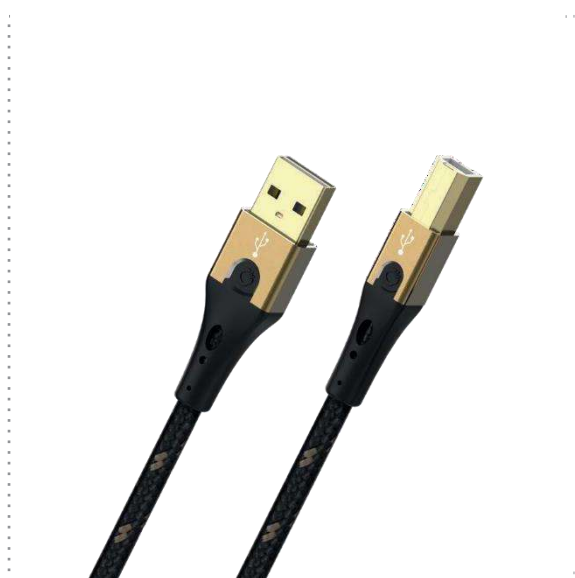

USB type B connectors are often found on audio amplifiers, printers or scanners, storage media or presentation beamers. With this type of connection, absolutely reliable and loss-free data transmission is particularly important. This is exactly what the Oehlbach USB 2.0 data cable USB Primus B achieves. The USB A connection can be used reversibly, i.e. on both sides. Oehlbach's USB Primus B creates a state of the art connection with the USB type A to type B cable. This special quality is primarily due to a monocrystalline oxygen-free inner conductor made of HPOCC copper. Under a triple shielding it provides unrestricted data transfer. The USB Primus B cable is equipped with 24ct gold plated full metal plugs at the two connections for 100% contact reliability. Further protection is provided by the cable's high-quality fabric jacket. This prevents accidental kinking and strengthens the durability of this premium cable.


**30 YEAR
GUARANTEE**


The Hi-Speed USB logo is a registered trademark of USB Implementers Forum, Inc.

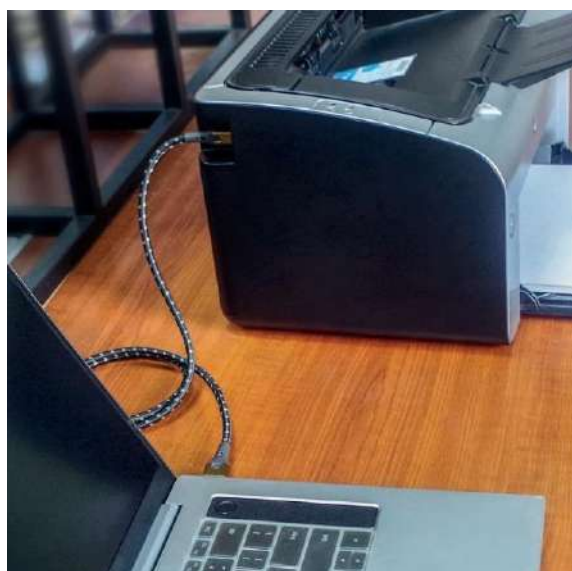

cable material	TPE, fabric sheath
Connector material	solid metal plug
Bending radius	45 mm
Colour	Black/Gold
Inner conductor material	HPOCC® - mono-crystalline oxygen-free copper inner conductor
cable geometry	Round
Shielding	triple shielding
Shielding construction	2 x aluminium foil + 1 x copper braiding
AWG	26/18 AWG
Transmission rate	480 Mbps
Features	Reliable contact, loss-free signal transmission, 24kt gold plated contacts , 30 years warranty, PVC Free
Cable diameter	6 mm

item no.	Length	Color	EAN	MSRP
9540	0.50 m	Black/Gold	4003635095409	
9541	1 m	Black/Gold	4003635095416	
9542	2 m	Black/Gold	4003635095423	



More information:



item no.	Length	Color	EAN	MSRP
9543	3 m	Black/Gold	4003635095430	
9544	5 m	Black/Gold	4003635095447	
9545	7.50 m	Black/Gold	4003635095454	
9546	10 m	Black/Gold	4003635095461	





USB 3.1 CABLE TYPE C TO TYPE C

USB PRIMUS CC

Once you have experienced the many advantages of a USB-C connection, such as the high speed of data transfers, the strong wattage of the power supply or the versatility of such connections, you will not want to do without it. Oehlbach has now once again paid special tribute to USB-C and has developed a state-of-the-art cable with the USB Primus CC, which takes the standard to the limit. It delivers data speeds of 10 GBit/s and in addition PowerDelivery with 40 Watt power. The Primus CC is based on maximum quality of all components for loss-free transmissions through and through. This starts with the oxygen-free HPOCC inner conductor, continues with a triple shielding and a durable flexible fabric sheath and ends with the 24kt gold-plated full metal connections with 100% contact reliability - and thanks to the clever connection base, this is fully maintained even with smartphones in the protective case.

USB 3.1
Type-C

USB 3.1
Type-C

SIGNAL DIRECTION



The SuperSpeed USB 10Gbps logo is a registered trademark of USB Implementers Forum, Inc.



cable material	TPE, fabric sheath
Connector material	solid metal plug
Bending radius	40 mm
Inner conductor material	HPOCC® - mono-crystalline oxygen-free copper inner conductor
cable geometry	Round
Shielding	triple shielding
Shielding construction	2 x aluminium foil + 1 x copper braiding
Transmission rate	10 Gbps
Features	Reliable contact, loss-free signal transmission, 24kt gold plated contacts , 30 years warranty, PVC Free, Power Delivery 40 W
Cable diameter	5 mm

item no.	Length	Color	EAN	MSRP
9530	0.50 m	Black/Gold	4003635095300	
9531	1 m	Black/Gold	4003635095317	
9532	2 m	Black/Gold	4003635095324	
9533	3 m	Black/Gold	4003635095331	

More information:

